

Venhart®

BRAND

Banding Machine

VH360P/F

The Venhart VH360P/F Banding Machine applies paper or film banding tape at up to 30 bands per minute. Automatic or manual operation.


Automatic: With the "table switch" set to "on" a photo electric sensor detects when an item is placed on the table and activates the banding cycle automatically.

Manual: With the "table switch" set to "off", pressing the "Start" button or foot pedal bands one article then supplies tape ready for the next.

Adjustable temperature, cooling time and tension. A safety switch stops the machine automatically when the door is opened.



Film and paper banding - one machine does it all!

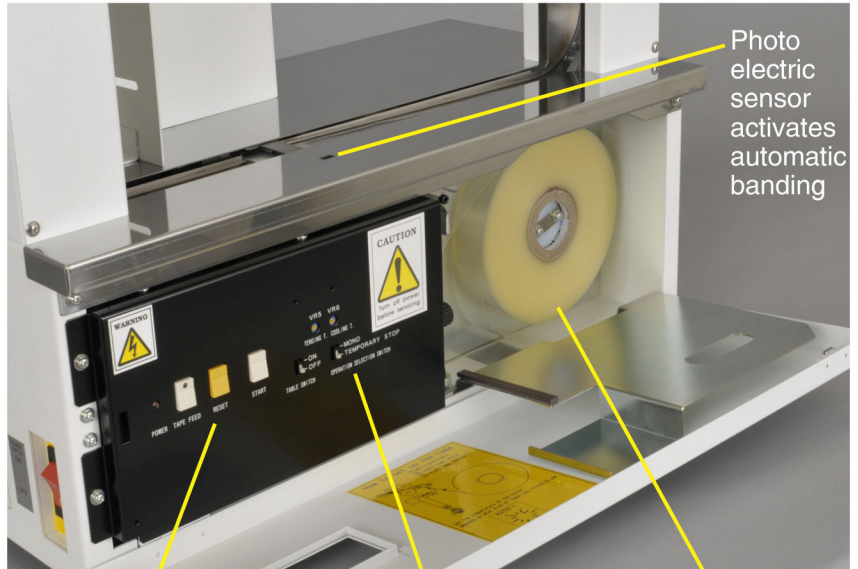

Specifications

- Banding speed: up to 30 per minute
- Tension: 5 to 30N adjustable
- Package size max: 420mm wide x 210mm high
- Package size min: 30mm wide x 10mm high
- Arch size (inner): 428mm wide x 216mm high
- Power Supply: 240V/60HZ/1-Phase.
- Dimensions: (LxWxH) 570mm x 282mm x 488mm
- Weight: 25.5kg



Main controls: Power On Light, Tape Feed, Reset, and Start buttons.



Table switch, turns photo electric sensor on or off. Mode switch, selects "Mono" for sequential banding or "Temporary" for one off banding.



Banding tape width: 30mm, roll outer diam: 180mm, core diam: 40mm. Uses 80g paper in white and brown and 60um to 110um film.

555 Church Street, Richmond, Vic. 3121, Melbourne, Australia.
Phone: (03) 9428 1652. Fax No: (03) 9429 5506.
www.venuspack.com.au Email:venus@venuspack.com.au



WARNING: All data in this brochure is provided as a guide only and should not be used in writing specifications. Purchasers should test any product offered herein to determine suitability for their particular purpose. May 2013