

The simple, affordable, versatile pallet stretch wrapper

Venus[®] M1580

Automatic and manual operation

Simple to operate, affordable to buy and maintain and the versatility you'd expect of far more expensive machines, that's the Venus M1580.

The operator always has total control, even whilst an automatic wrapping cycle is in progress. Without interrupting the cycle he can add extra wraps, adjust the film tension, and vary the speed of the film carriage and turntable.

Automatic wrapping


Simply choose an **Up/down** or **Up only** cycle then specify the reinforcing wraps as required at the top or bottom or both. Adjust the film carriage speed and the turntable speed then press the start button.

Manual wrapping

Pushbutton turntable control. Each press of the film carriage button alternatively raises or lowers the film carriage.

More versatility

- Gentle, slow stop and start.
- Turntable always stops at same home position.
- Photo electric eye senses pallet height in auto mode.
- Control panel rotates 180 degrees; allows operation from either side.
- Operates on standard mains 240v power
- Trouble shooting options display.

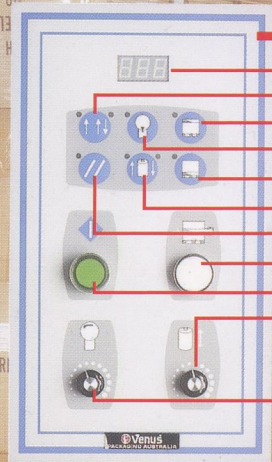

- Function display
- Program settings (auto)
- Top wraps (auto)
- Turntable (manual)
- Bottom wraps (auto)
- Film carriage (manual)
- Reset
- Extra wraps (auto)
- Start
- Film carriage speed adjustment

Turntable speed adjustment to 12 RPM

Control box rotates 180 degrees

Film tension adjustment


Safety trip switch stops film carriage descent if it meets an obstruction

Forklift slots allow transportation from either side.

Forklift slots allow transportation from either side.

Specifications

Machine size LxWxH:	2325mm x 1500mm x 2345mm
Wrapping height max:	2000mm
Turntable speed max:	12rpm
Film roll: width 500mm:	outer diam. 250mm: inner diam. 76mm
Load weight max:	1650kg
Power supply:	240v single phase
Film carriage:	chain driven

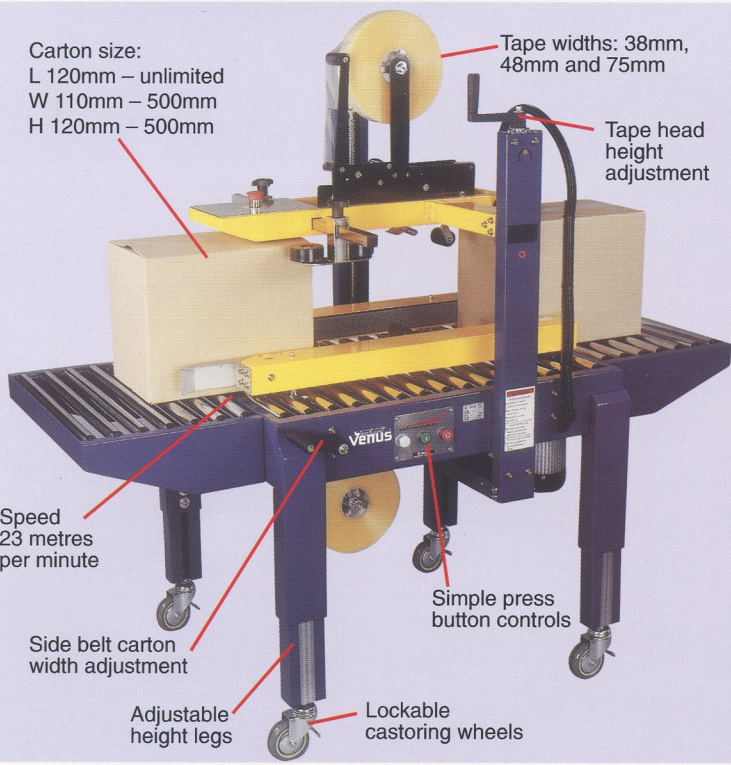

Carton size:
L 120mm – unlimited
W 110mm – 500mm
H 120mm – 500mm

Tape widths: 38mm, 48mm and 75mm

Tape head height adjustment

Speed 23 metres per minute

Side belt carton width adjustment

Adjustable height legs

Lockable castoring wheels

Simple press button controls

Uniform side belt carton sealer

Venus[®] 209A MkIII

Removable infeed and outfeed roller extensions are a standard feature of this robust heavy duty sealer. The closely spaced rollers ensure steady and stable travel of small cartons while 4 special "press" rollers guide heavy cartons smoothly through the machine. The tape head height and drive belt spacing are quickly adjustable to suit the carton size. The drive belt tension is also easily adjustable by the operator. Simple press button controls.

Specifications

Machine size LxWxH	1713mm x 854mm x 1350mm
Carton size Min. LxWxH	120mm x 110mm x 120mm
Carton size Max. LxWxH	Unlimited x 500mm x 500mm
Speed	23 metres per minute
Tape widths	38mm, 48mm and 75mm
Power supply	240v single phase