

# Venus®

## BENCHTOP BAND SEALERS

**The affordable bulk bag sealing solution.**

With one compact machine you can set up your own packaging line. Simply feed the filled bags in at one end and they come out the other with their tops sealed.

Seals LDPE, PE, PP, PVC, cello and layered barrier bags. For bags best sealed in the vertical position such as confectionary liquids, and pasta choose the VH882VC. For items that need to lie flat such as magazines and stationery choose the VH881HC.

Both models come with an imprint kit for adding an expiry date, batch number or other information during the sealing process.

### Specifications

- Bag length: VH881HC - Sealing head to outer edge of conveyor 170mm. VH882VC - Sealing head to conveyor adjustable from 100mm to 260mm.
- Maximum seal speed: 12m/min
- Seal width: 6mm to 10mm
- Conveyor table width: 150mm
- Temperature range: 30 to 300 deg. C
- Seal distance below bag top adjustable from 0 to 30mm
- Maximum seal thickness: 2 x 0.4mm (PE)
- Belt loading capacity: Less than 6kg
- Power consumption: 550w
- Weight: 29kg



VH882VC

### Imprint Kit

Includes imprint wheel, numerals 0-9 and alpha characters for imprinting an expiry date, batch number etc.




Now with photo eye activated thermal ribbon black imprinter VH881HCP



VH881HC

\*Left to right operation is an available option

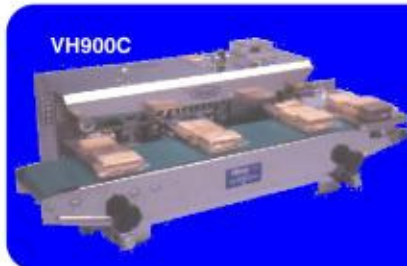

VH900C

## Economy Models

- Stainless steel.
- Adjusts from vertical to horizontal.
- Seals all types of poly films: polythene, polypropylene, laminates.
- Conveyor speed, seal pressure, sealing temperature and cooling fan controls.
- Adjustable conveyor height, conveyor tension and bag length/height.
- Seal width 15mm.
- Film thickness 2 x 50 microns to 2 x 100 microns.
- Conveyor width 125mm.
- Conveyor length 720mm.
- Sealing head to conveyor (vertical) Min. 140mm. Max. 340mm.
- Sealing head to conveyor outer edge (horizontal) Min. 100mm. Max. 400mm.



VH900T/C

## OTHER Venus BAND SEALERS



Horizontal

Conveyor width 200mm, length 1300mm, speed 1m to 10m per minute. Seal width 7mm or 10mm.



Vertical/  
Horizontal

Conveyor width 250mm, length 1400mm, speed 0 to 10m per minute. Bag height 90mm to 430mm. Seal width 10mm.



VH1100  
Horizontal

Bag thickness 0.02mm to 0.8mm. Seal width 5mm to 9mm. Conveyor belt width 150mm. Printer.



VH1300  
Vertical

Bag height 450mm to 800mm. Bag thickness 0.02mm to 0.8mm. Seal width 5mm to 15mm. Conveyor belt width 200mm. Printer.



VH1500  
Vertical

Bag height 280mm to 450mm. Bag thickness 0.02mm to 0.8mm. Seal width 5mm to 15mm. Conveyor belt width 200mm. Printer.

555 Church Street, Richmond, Vic. 3121, Melbourne, Australia.  
Phone: (03) 9428 1652. Fax No: (03) 9429 5506.  
www.venuspack.com.au Email:venus@venuspack.com.au

**Venus**  
PACKAGING

WARNING: All data in this brochure is provided as a guide only and should not be used in writing specifications. Purchasers should test any product offered herein to determine suitability for their particular purpose. June 2007